




FITTING INSTRUCTIONS FOR BP0004BK BASH PLATE
HUSQVARNA TE125 2012

Page | 1



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

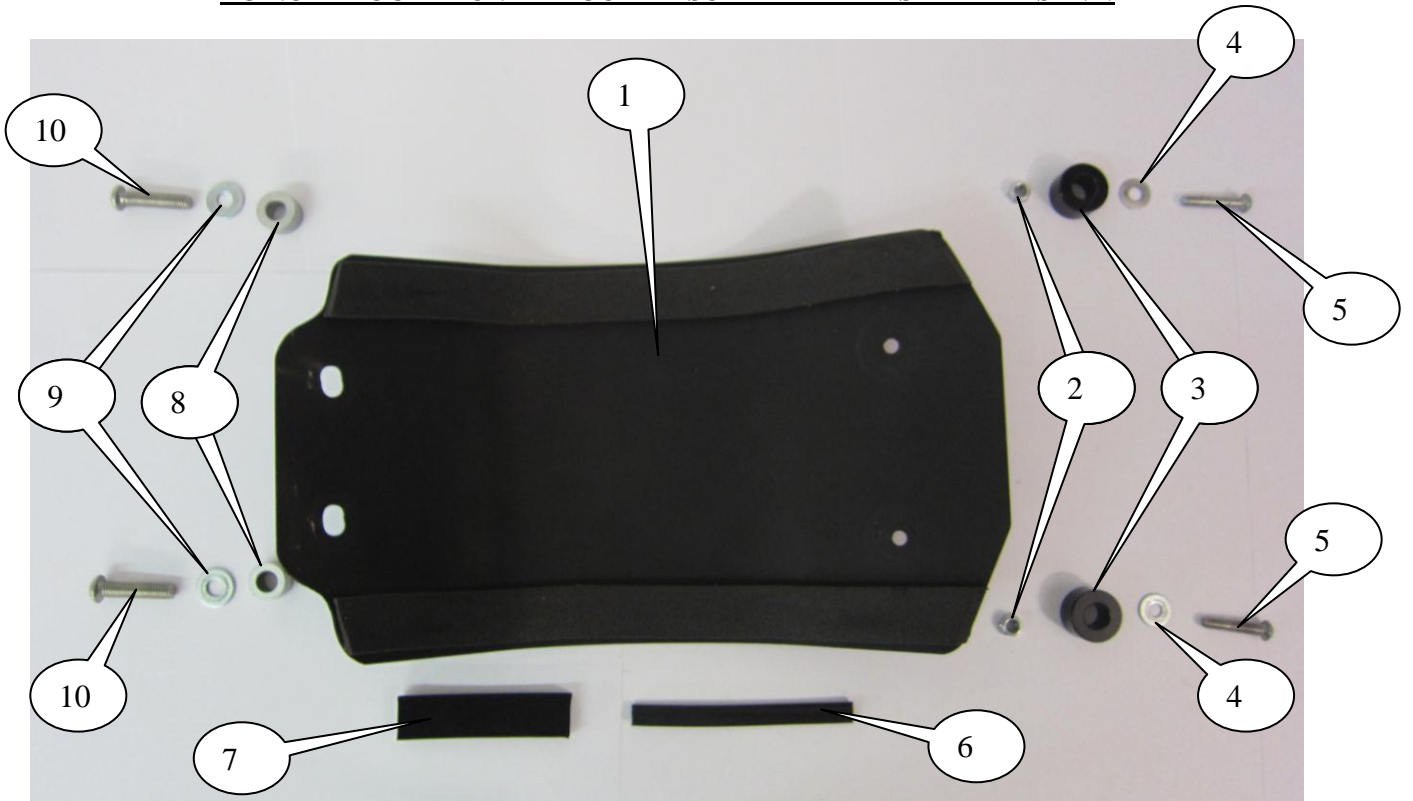

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)



Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

Page | 2

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

TOOLS REQUIRED

- 10 and 12mm spanners.
- 4 and 5mm allen keys.
- Rubber adhesive.

LEGEND

ITEM 1 = SMW0013 BASH PLATE (x1).

ITEM 2 = M6 NYLOC NUTS (x2).

ITEM 3 = S0570 SPACERS (REAR = 15mm LONG) (x2).

ITEM 4 = M6 WASHERS (x4).

ITEM 5 = M6 x 30mm LONG BUTTON HEAD BOLTS (REAR MOUNT) (x2).


ITEM 6 = RUBBER EDGING SEAL (SRS002) 800mm LONG.

ITEM 7 = SELF ADHESIVE NEOPRENE FOAM (600mm LONG).


ITEM 8 = S0569 SPACERS (FRONT = 11mm LONG) (x2).

ITEM 9 = M8 WASHERS (x2).

ITEM 10 = M8 x 35mm LONG BUTTON HEAD BOLTS (FRONT MOUNT) (x2).

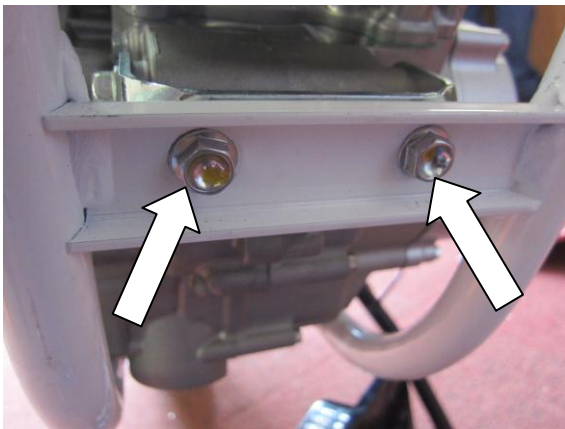

PICTURE 1

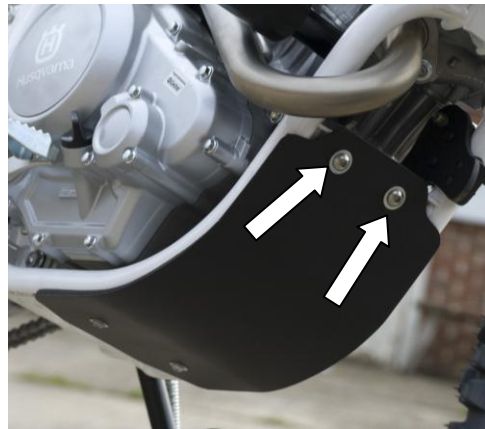

PICTURE 2



PICTURE 3

FITTING INSTRUCTIONS

- CUT AND APPLY THE RUBBER EDGING SEAL (ITEM 6) ALONG THE TOP AND FRONT EDGES OF THE BASH-PLATE (ITEM 1) (PLEASE USE ADHESIVE TO HOLD IN POSITION).
- CUT AND APPLY THE SELF ADHESIVE NEOPRENE FOAM (ITEM 7) AS SHOWN IN THE PARTS PICTURE.
- REMOVE THE TWO BOLTS ARROWED IN PICTURE 1 (YOU WILL NEED TO REUSE THE NUTS).
- PLACE THE TWO M8 BOLTS WITH WASHERS (ITEMS 9 AND 10) THROUGH THE BASH-PLATE AS ARROWED IN PICTURE 2.
- PLACE THE TWO THINNER SPACERS (ITEM 8) OVER THE EXPOSED END OF THE BOLTS.
- OFFER INTO POSITION AS SHOWN IN TOP PICTURE AND SECURE USING THE ORIGINAL NUTS (DO NOT TIGHTEN AT THIS STAGE).
- PLACE THE TWO M6 BOLTS WITH WASHERS (ITEMS 4 AND 5) THROUGH THE TWO HOLES ARROWED IN PICTURE 3.
- PLACE THE TWO THICKER SPACERS (ITEM 3) OVER THE EXPOSED END OF THE BOLTS.
- PUSH THE BOLTS THROUGH THE HOLES IN THE FRAME MEMBER AND SECURE USING THE TWO NUTS (ITEM 2).
- TIGHTEN ALL NUTS AND BOLTS WHEN HAPPY WITH THE FIT.

Issue 1 20/11/2012 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those

R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in resellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.




Instructions de montage BP0004BK Plaque protection éclaboussures
HUSQVARNA TE125 2012

Page | 5



Le kit contient les articles exposés ci-dessous, vérifier que toutes les pièces soient présentes avant de procéder au montage.

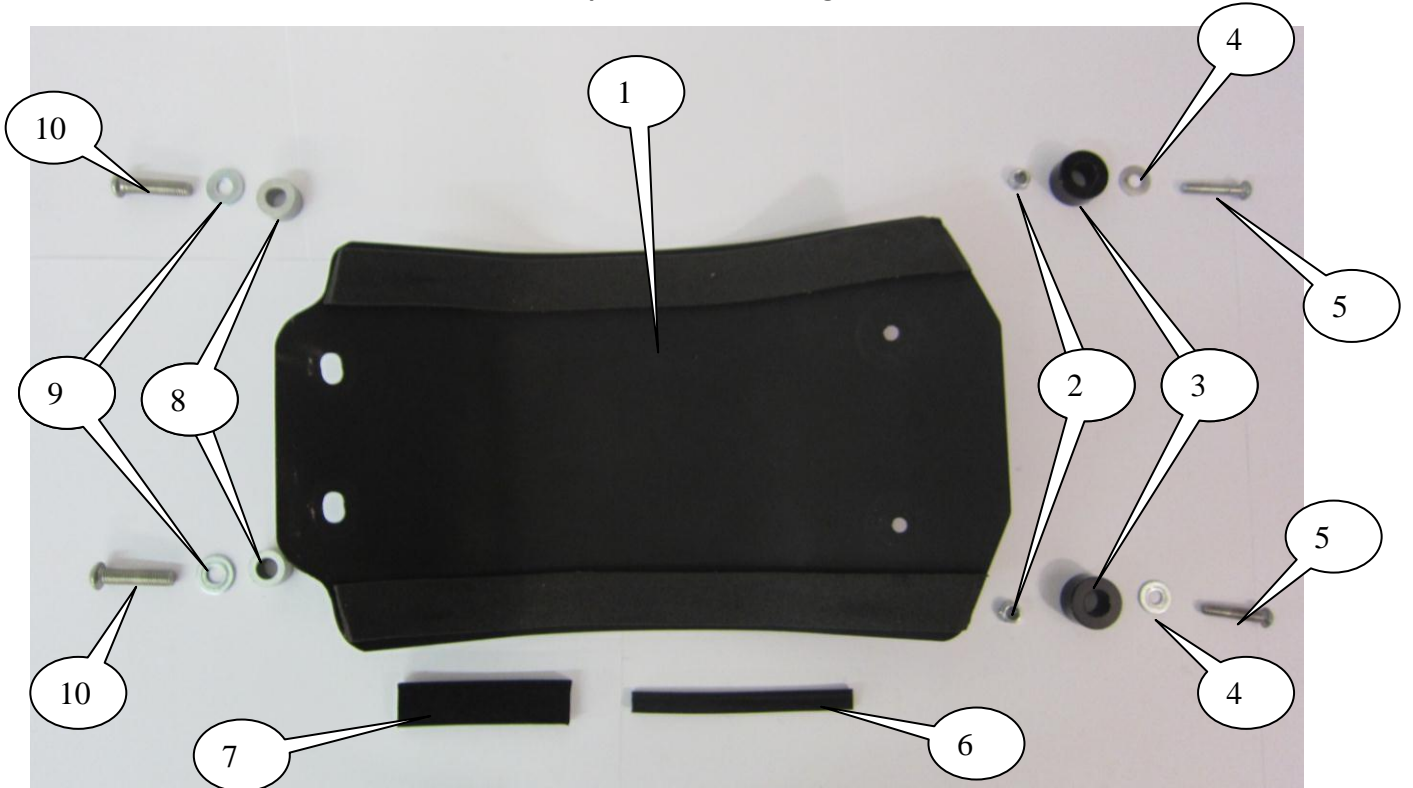

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



La façon dont le kit est emballé ne correspond pas forcément à la façon de monter les pièces sur la moto.

Notez que si les kits sont emballés avec des rondelles en caoutchouc servant à tenir les composants, ces rondelles doivent être jetées.

Page | 6

Outils requis

- Pinces 10 et 12 mm
- Clés Allen 4 et 5 mm
- Gomme adhésive

LEGENDE

ARTICLE 1 = SMW0013 Plaque protection éclaboussures (x1).

ARTICLE 2 = M6 Ecrous Nyloc (x2).

ARTICLE 3 = S0570 Entretoises (Arrière = 15mm de long) (x2).

ARTICLE 4 = M6 Rondelles (x4).

ARTICLE 5 = M6 x 30mm Longs boulons tête ronde (Support arrière) (x2).

ARTICLE 6 = Joint bordure en caoutchouc (SRS002) 800mm de long

ARTICLE 7 = Mousse neoprene autocollante (600mm de long).

ARTICLE 8 = S0569 Entretoises (Avant = 11mm de long) (x2).

ARTICLE 9 = M8 Rondelles (x2).

ARTICLE 10 = M8 x 35mm Longs boulons tête ronde (Support avant) (x2).

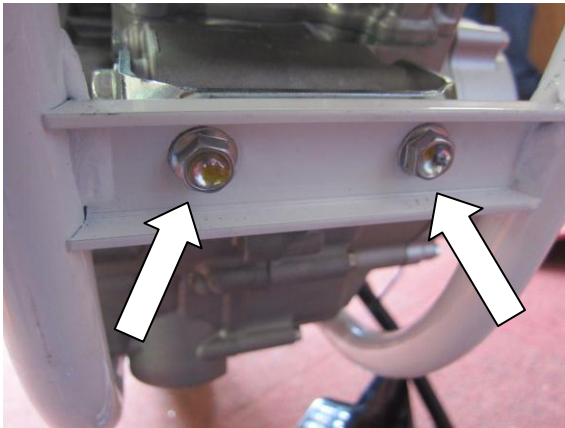


PHOTO 1

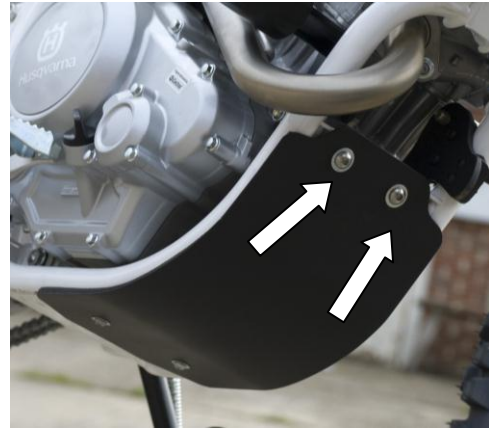


PHOTO 2

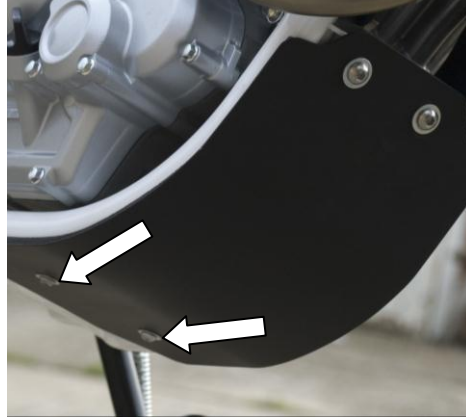


PHOTO 3

Instructions de montage:

- Couper et poser le joint de bordure en caoutchouc (ARTICLE 6) le long des bords supérieurs et avant de la protection (ARTICLE 1) (utiliser l'adhésif pour maintenir en position).
- Couper puis appliquer la mousse autocollante en Néoprène (ARTICLE 7) (Photos)
- Enlever les 2 boulons (PHOTO 1) (Les écrous devront être réutilisés).
- Placer les 2 boulons M8 avec rondelles (ARTICLES 9 ET 10) à travers la protection (PHOTO 2).
- Placer les 2 entretoises (ARTICLE 8) autour des extrémités des boulons.
- Mettre en position (Photo du haut puis fixer à l'aide des écrous d'origine) (Ne pas bloquer à ce stade).
- Placer les 2 boulons M6 avec rondelles (ARTICLES 4 ET 5) à travers les 2 trous (PHOTO 3).
- Placer les 2 entretoises épaisses (ARTICLE 3) autour des extrémités des boulons.
- Pousser les boulons à travers les trous dans l'élément de cadre et fixer à l'aide des 2 écrous (ARTICLE 2).
- Bloquer tous les écrous et boulons lorsque le montage vous convient.

Issue 1 20/11/2012 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in resellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.