




FITTING INSTRUCTIONS FOR SP0032 SWINGARM-PROTECTORS
BMW F800 ST 2006-



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

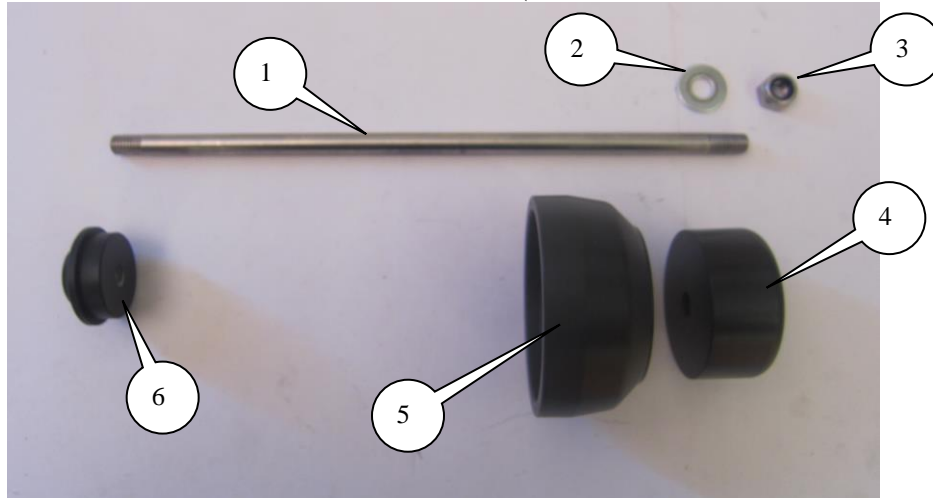

LEGEND

- ITEM 1 = SPINDLE BAR (SB090 APPROX 237.5mm LONG) (x1)
- ITEM 2 = M8 WASHER (19mm OUTSIDE DIAMETER) (x1).
- ITEM 3 = M8 NYLOC NUT (x1).
- ITEM 4 = R-H-S CRASH PROTECTOR (B0442 M8 (8mm INTERNAL DIAMETER)) (x1).
- ITEM 5 = RIGHT-HAND SPACER (S0512, 70mm OUTSIDE DIAMETER) (x1).
- ITEM 6 = LEFT-HAND THREADED SPACER (S0511) (x1).

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*



TOOLS REQUIRED

- SOCKET SET TO INCLUDE 13 AND 21mm SOCKETS
- SMALL AMOUNT OF SEMI-PERMANENT THREAD LOCK.

FITTING INSTRUCTIONS

- PLACE THE SPINDLE BAR (ITEM 1) INTO THE THREADED SPACER (ITEM 6); PLEASE ENSURE THE THREADS ARE FULLY ENGAGED. IT IS A GOOD IDEA TO USE A SMALL AMOUNT OF SEMI-PERMANENT THREAD LOCK TO SECURE IN PLACE.
- PLACE THE ASSEMBLY THROUGH THE REAR SPINDLE FROM THE LEFT HAND SIDE SO THE SPACER LOCATES INTO THE REAR WHEEL SPINDLE AS SHOWN IN THE TOP LEFT PICTURE.
- PLACE THE LARGER SPACER (ITEM 5) OVER THE EXPOSED END OF THE SPINDLE BAR (AS SHOWN IN TOP RIGHT PICTURE).
- PLACE THE CRASH PROTECTOR (ITEM 4) OVER THE EXPOSED END OF THE SPINDLE BAR (AS SHOWN IN TOP RIGHT PICTURE).
- USE THE NUT AND WASHER (ITEMS 2 AND 3) AND SECURE IN PLACE. DO NOT OVER-TIGHTEN—THE NYLOC NUT WILL HOLD IT TIGHT.

ISSUE 2 16/07/2019

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.




Instructions de montage
SP0032 Protections bras oscillant
BMW F800ST 2006-



LE KIT CONTIENT LES ARTICLES EXPOSES CI-DESSOUS, VERIFIER QUE TOUTES LES PIECES SOIENT PRESENTES AVANT DE PROCEDER AU MONTAGE.

LA FAÇON DONT LE KIT EST EMBALLE NE CORRESPOND PAS FORCEMENT A LA FAÇON DE MONTER LES PIECES SUR LA MOTO.

LES PIECES PRESENTEES PEUVENT N'ETRE QUE REPRESENTATIVES, AFIN DE FACILITER ET CLARIFIER LES INSTRUCTIONS DE MONTAGE.

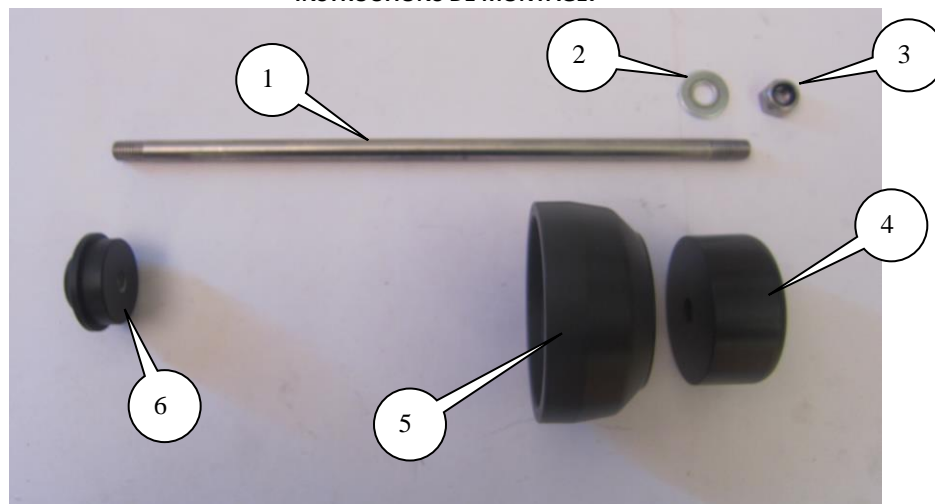

LEGENDE

- Article 1 = Axe (SB090 environ 237.5mm de long) (x1)
- Article 2 = M8 Rondelle (19mm de diameter extérieur) (x1).
- Article 3 = M8 Ecrou en nyloc (x1).
- Article 4 = Protection Crash coté droit (B0442 M8 (8mm de diamètre interne)) (x1).
- Article 5 = Entretoise coté droit (S0512, 70mm de diamètre extérieur) (x1).



Article 6 = Entretoise coté gauche (S0511) (x1).

Notez que si les kits sont emballés avec des rondelles en caoutchouc servant à tenir les composants, ces rondelles doivent être jetées.

Outils requis

- Clés 13 et 21 mm (kit)
- Un peu de frein-filet semi permanent.

Instructions de montage:

- Placer l'axe (article 1) dans l'entretoise (article 6); assurez vous que les filetages soient complètement engagés. Il est utile d'utiliser un peu de frein-filet semi permanent pour fixer.
- Placer l'ensemble à travers l'axe arrière depuis le coté gauche de façon à ce que l'entretoise se loge dans l'axe de roue arrière (photo en haut à gauche).
- Placer la grand entretoise (article 5) autour de l'extrémité de l'axe (photo de droite).
- Placer la protection (article 4) autour de l'extrémité de l'axe (photo en haut à droite).
- Utiliser l'écrou et la rondelle (articles 2 et 3) puis fixer le tout. Ne pas trop serrer, l'écrou en nyloc tiendra le tout en place.

ISSUE 2 16/07/2019

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.