



**FITTING INSTRUCTIONS FOR LP0075BK LICENCE PLATE BRACKET
BUELL 1125R 2008-**



Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

PLEASE READ ALL INSTRUCTIONS BEFORE COMMENCING

YOU WILL NEED THE FOLLOWING TOOLS TO COMPLETE THIS JOB

Set of metric allen keys.

10 AND 12mm spanners.


Electrical stripping and crimping pliers.

- NOTE YOU WILL NEED TO GLUE THE LIGHT SHROUD TO THE LED LICENCE PLATE LIGHT BEFORE FITTING USING SUPER GLUE.
- Remove seat.
- Remove pillion seat (using key).
- Undo and remove all seat cowl fixings (do not remove cowl or key mechanism).
- Gently pull seat cowl over rear sub-frame as shown below.





- Disconnect rear light connectors located under pillion seat on left hand side as shown below left (please note or mark wires for reassembly).
- Disconnect rear indicator connectors located under pillion seat on left hand side shown below left (please note or mark wires for reassembly).
- Undo and remove three bolts that attach OEM number plate bracket positioned as arrowed below right. Gently lower OEM number plate bracket.

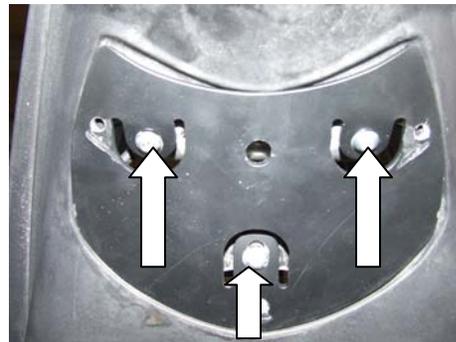

- Offer flatter mounting plate up to bike as shown above right and using longer button head bolts from new kit secure in position.
- Take new number plate light from kit and secure to new number plate bracket in position as shown in top picture.
- If using OEM indicators fit to new number plate bracket, or if using mini indicators we suggest using R&G mini's (product code RG370 you will not need resistors for this product) fit these to new number plate bracket.
- Feed all wires through central hole in new number plate bracket.
- Fit heat shrink from kit over number plate wires and heat to achieve a snug protective sleeve (do not over heat).
- Offer up to mounting plate while feeding wires through larger central hole in mounting plate and secure in position using shorter button head bolts from kit as shown below left.





- Connect all wires as original.
- Check operation of lights and indicators.
- Refit cowl and secure as original.
- Refit pillion seat and rider seat.
- Refit licence plate.
- **IMPORTANT: IF FITTING A FULL-SIZE LICENCE PLATE AND PLACING IT FAR DOWN ON THE LICENCE PLATE HANGER, THERE IS A SMALL CHANCE OF THE LICENCE PLATE HITTING THE BACK WHEEL UNDER HEAVY LOAD AND OVER LARGE BUMPS IN THE ROAD. IT IS YOUR RESPONSIBILITY TO CHECK FOR THIS POSSIBILITY AND TAKE AVOIDING ACTION. FAILURE TO CHECK THIS COULD RESULT IN SERIOUS INJURY.**
- Depending on local laws, attach enclosed red reflective tape in an appropriate location.
- Please test the indicators, rear/brake light and licence plate illuminator before riding.

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in resellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.