




Fitting Instructions for DG0012 BK Downpipe Grille
KAWASAKI NINJA 300 2013--



In This Kit There Should Be
1x Downpipe Grille (DG0012)
2x M6 x 30mm Button Head Bolts

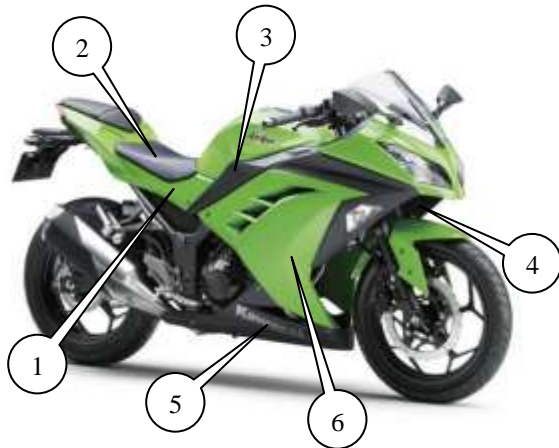

Picture 1



Picture 2

R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Picture 3



Picture 4



Picture 5



Picture 6

TOOLS REQUIRED

- Socket set to include 10mm socket & wrench.
 - 4 & 5mm A/F allen key
 - Phillips screwdriver



FITTING INSTRUCTIONS

- Remove both side fairings from the bike, along with the plastic radiator surround. To do this, the bodywork and seat must be removed in the order shown in picture 1.
- Remove the two bolts that secure the bottom of the radiator, as shown in picture 2.
- Offer the R&G Downpipe Grille into position and locate the two bolts through the top of the downpipe grille and into the threaded boss of the radiator. *If also fitting the R&G Radiator Guard (RAD0139), position this first on the mount, with the downpipe grille fitting last, and insert the M6 x 30mm long button head bolts (make sure the original washer is positioned in front of the rubber mount, as shown in picture 3 & 4).*
- Tighten the two bolts evenly.
- Re-fit the fairings in the same method as they were removed, ensuring to reconnect the indicators..
- When fitting the lower fairings, ensure the front push rivet mount also secures through the bottom hole on the downpipe grille. To do this, you may have to access this from underneath with your hand.
- Refit the remaining panel and seat.

ISSUE 1 20/11/2012 (AR)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



**Instructions de montage DG0012 BK Grille protection tuyaux
KAWASAKI NINJA 300 2013--**



Le kit doit contenir :

- 1x Grille de protection (DG0012)**
- 2x M6 x 30mm Boulons à tête hexagonale**

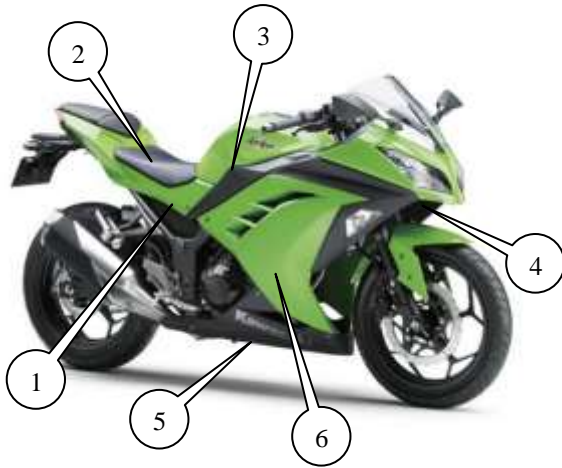


Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



Photo 6

Outils requis

- Clé 10mm
- Clé Allen 4 et 5mm
- Tournevis cruciforme



Instructions de montage:

- Enlever les 2 carénages de la moto, avec le contour de radiateur en plastique. Pour cela, le siège doit également être enlevé (Photo 1).
- Enlever les 2 boulons qui fixent le bas du radiateur (Photo 2).
- Mettre la grille en position et loger les 2 boulons à travers les trous du haut de la grille et dans le patron fileté du radiateur. *Si vous avez déjà installé la grille de protection radiateur R&G (RAD0139), positionnez la en 1er sur le support, et insérer les boulons à tête hexagonale M6 x 30mm (Soyez sûr que la rondelle d'origine soit positionnée sur l'avant du support en caoutchouc (Photos 3&4).*
- Serrer les 2 boulons de façon égale.
- Remettre les carénages selon la même méthode que lorsque vous les avez enlevés, en vous assurant que les clignotants soient bien branchés.
- Lorsque vous installez les carénages du bas, assurez-vous que le poussoir passe à travers le trou du bas sur la grille de protection des tuyaux. Pour ce faire, vous pouvez y accéder par le dessous.
- Remettre le carénage restant et le siège.

ISSUE 1 20/11/2012 (AR)



Montageanleitung für das Krümmerschutzgitter DG0012 BK
KAWASAKI NINJA 300 2013--



Dieser Kit enthält:
1x Krümmerschutzgitter (DG0012)
2x M6 x 30mm Inbusschrauben

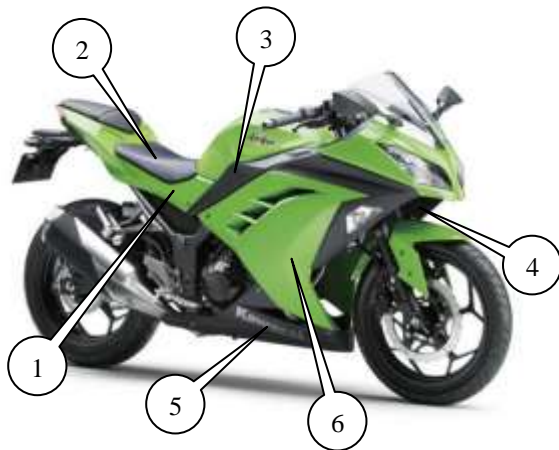


Abbildung 1



Abbildung 2



Abbildung 3



Abbildung 4



Abbildung 5



Abbildung 6

SIE BENÖTIGEN FOLGENDES WERKZEUG:

- 10mm Steckschlüssel
- 4 & 5mm Inbusschlüssel
- Kreuzschlitzschraubendreher



MONTAGEANLEITUNG:

- Entfernen Sie beide Seitenverkleidungen und die Plastikabdeckung für den Kühler. Bitte die Teile unbedingt in der dargestellten Reihenfolge (siehe Abbildung 1) entfernen!
- Entfernen Sie die zwei Schrauben, die den Kühler unten befestigen – siehe Abbildung 2.
- Das R&G Krümmerschutzgitter in Position fixieren und die zwei Schrauben durch das Krümmerschutzgitter (oben) dann in die Lochplatte am Kühler einschrauben. *Wenn Sie auch den R&G Kühlerschutz (RAD0139 montieren), zuerst den Kühlerschutz auf der Halterung positionieren - das Krümmerschutzgitter zuletzt montieren und die M6 x 30mm Inbusschrauben einschrauben (die Original-Unterlegscheibe vor der Gummihalterung positionieren – siehe Abbildung 3 & 4).*
- Ziehen Sie die zwei Schrauben gleichmäßig fest.
- Montieren Sie die Verkleidungen und verbinden Sie die Blinker wieder.
- Bei der Montage der unteren Verkleidungen darauf achten, dass die Halterung, die mit der Linsenkopfschraube befestigt wird, auch die untere Öffnung im Krümmerschutzgitter mitbefestigt – hierbei müssen Sie eventuell mit Ihrer Hand von unten zugreifen.
- Montieren Sie die übrige Verkleidung und den Sitz.